


INTERFACE CONNECTORS

USB3.1 Micro-B Receptacle

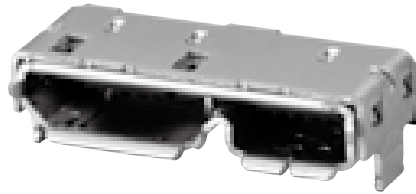

- Conforms to USB 3.1 standard
- Conforms to USB-PD
- Rating: 3A(Power:USB-PD), 0.25A(Signal), 30V AC
- Contact Resistance: 30mΩ max.(Power)
50mΩ max.(Signal)
- Insulation Resistance: 100MΩ min. at 500V DC
- Withstanding Voltage: 100V AC(for one minute)
- Operating Life: 10,000 cycles

Normal · On Board

CSS5310-7H01F

